TECHNICAL DATA SHEET

OKBE10630

3 Ply 150 Brown Butyl Roughtop x Bare
150 PIW

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Compound			**Butyl/EPDM**
	Thickness	**1/8** in.	*3.30* *mm*	
	Surface			**Roughtop**
	Colour			**Brown**
CARCASS	Fabric			**Polyester**
	Number of plies			**3**
	Cross rigid			**No**
BOTTOM	Compound			**Bare RFL**
	Surface			**Bare**

02 TECHNICAL SPECIFICATIONS

Overall gauge	**19/64**	in.	*7.62*	*mm*
Unit weight	**0.1000**	lb/PIW		
Tension rating	**150**	PIW	*26.2*	*N/mm*
Temperature – minimum [1]	**–65**	°F	*–54*	*°C*
Temperature – maximum [1]	**300**	°F	*149*	*°C*

03 MINIMUM PULLEY DIAMETER [2]

Minimum pulley diameter	**2.50 in**



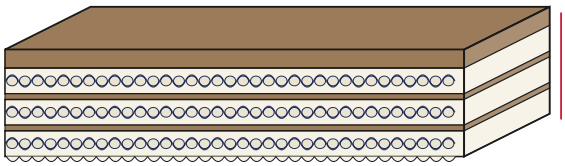

TOP COVER brown · roughtop
3-PLY POLYESTER polyester
FABRIC DRIVE FACE bare · drive side

CROSS-SECTION – NOT TO SCALE

GAUGE 19/64 IN. / 7.62 MM

04 PROPERTIES

FDA compliant compound	NO
Oil resistant	NO
Fire resistant	NO
High heat	YES
Static conducting	NO
Cross rigid	NO
Impression (textured) top	YES

05 SPLICING & FASTENERS

Step splice	**Yes**
Finger splice	**No**
Staple fastener	**#125**
Wire hook lacing	**#1**
Alligator lacing	**#1**

06 APPLICATION

The Butyl properties of this belt provide good resistance to heat, chemicals, abrasion and is an excellent option for shock absorption.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES [1] Operating the belt at its limit values may reduce service life. [2] Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.