TECHNICAL DATA SHEET

OKBE10874

3 Ply Poly 171 White PVC C x C AS ATEX FDA
FDA · Oil resistant · Fire resistant

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Compound			**White PVC**
	Thickness	**0.0787**	in.	*2.00 mm*
	Surface			**Smooth**
	Hardness			**73 Shore A**
CARCASS	Number of plies			**3**
	Skim between plies			**PVC**
BOTTOM	Compound			**White PVC**
	Thickness	**0.0394**	in.	*1.00 mm*
	Surface			**Smooth**
	Hardness			**73 Shore A**


02 TECHNICAL SPECIFICATIONS

Overall gauge	**0.2400**	in.	*6.10*	*mm*
Unit weight	**0.1317**	lb/PIW		
Pull for 1% elongation	**171**	lbs/in.	*30*	*N/mm*
Temperature — minimum [1]	**5**	°F	*−15*	*°C*
Temperature — maximum [1]	**176**	°F	*80*	*°C*
Max. production width	**78**	in.	*1981*	*mm*

03 MINIMUM PULLEY DIAMETER [2]

■ Normal flex	**7.8740**	in.	*200.00*	*mm*
■ Back flex	**9.8425**	in.	*250.00*	*mm*



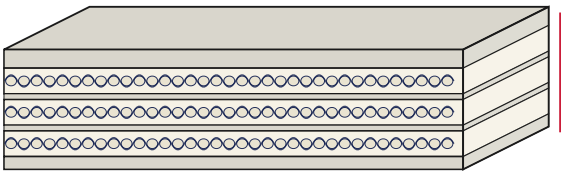

TOP COVER — smooth
3-PLY FABRIC
BOTTOM COVER — smooth · drive side

CROSS-SECTION — NOT TO SCALE

GAUGE 0.2400 IN. / 6.10 MM

04 PROPERTIES

FDA compliant compound	YES
Oil resistant	YES
Fire resistant	YES
Antistatic	YES

05 SPLICING & FASTENERS

Splice process	**Step Hot**
Release foil	**Yes**

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES [1] Operating the belt at its limit values may reduce service life. [2] Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.