TECHNICAL DATA SHEET

OKBE24357

2 Ply Black Roughtop x Base Flame Resistant
Fire resistant

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Compound		**Black SBR**
	Thickness	**0.0930** in.	*2.36 mm*
	Surface		**Roughtop**
	Hardness		**60 Shore A**
CARCASS	Number of plies		**2**
	Skim between plies		**SBR**
	Cross rigid		**No**
BOTTOM	Compound		**Black SBR**
	Surface		**Bare**


02 TECHNICAL SPECIFICATIONS

Overall gauge	**0.2660**	in.	*6.76*	*mm*
Unit weight	**0.0970**	lb/PIW		
Pull for 1% elongation	**160**	lbs/in.	*28*	*N/mm*
Temperature — minimum [1]	**–30**	°F	*–34*	*°C*
Temperature — maximum [1]	**180**	°F	*82*	*°C*
Max. production width	**72**	in.	*1829*	*mm*

03 MINIMUM PULLEY DIAMETER [2]

■ Normal flex	**3.0000**	in.	*76.20*	*mm*
■ Back flex	**3.0000**	in.	*76.20*	*mm*



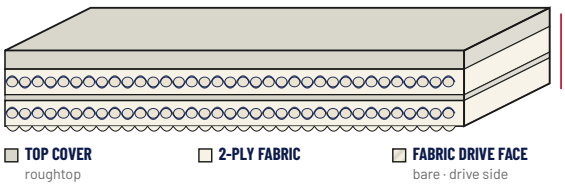

CROSS-SECTION — NOT TO SCALE

GAUGE 0.2660 IN. / 6.76 MM

04 PROPERTIES

FDA compliant compound	NO
Oil resistant	NO
Fire resistant	YES
Antistatic	NO
Cross rigid	NO
Impression (textured) top	YES

05 SPLICING & FASTENERS

Splice process	**Step Hot**
Release foil	**No**

06 APPLICATION

Polyester fabric has low stretch and offers excellent fastener retention. Treated duck bottom has a low coefficient of friction for slider bed applications. Ideal for package handling, distribution centers, airport baggage handling and airplane loader belts. This belt is ideal for Power Turn applications requiring flame retardant requirements

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES [1] Operating the belt at its limit values may reduce service life. [2] Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.