TECHNICAL DATA SHEET

OKBE27998

3 Ply 225 Blue Carbox Nitrile RT x BB
Oil resistant · 225 PIW

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Compound		Blue Nitrile
	Thickness	1/8 in.	3.30 mm
	Surface		Roughtop
	Colour		Blue
CARCASS	Fabric		Polyester
	Number of plies		3
	Cross rigid		No
BOTTOM	Compound		Bare RFL
	Surface		Bare

02 TECHNICAL SPECIFICATIONS

Overall gauge	19/64	in.	7.54	mm
Unit weight	0.1150	lb/PIW		
Tension rating	225	PIW	39.4	N/mm
Temperature — minimum [1]	0	°F	−18	°C
Temperature — maximum [1]	250	°F	121	°C

03 MINIMUM PULLEY DIAMETER [2]

Minimum pulley diameter	8.00 in



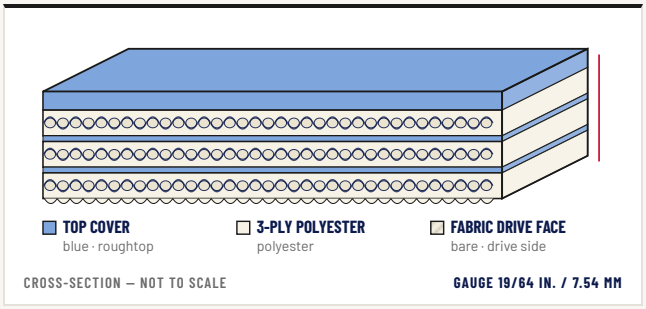

CROSS-SECTION — NOT TO SCALE

GAUGE 19/64 IN. / 7.54 MM

04 PROPERTIES

FDA compliant compound	NO
Oil resistant	YES
Fire resistant	NO
High heat	NO
Static conducting	NO
Cross rigid	NO
Impression (textured) top	YES

05 SPLICING & FASTENERS

Step splice	Yes
Finger splice	No
Staple fastener	#125
Wire hook lacing	#2
Alligator lacing	#15

06 APPLICATION

Carbox nitrile roughtop yields vastly longer service life than rubber roughtop. Is ideal where regular roughtop surfaces wear down quickly and must be replaced. Popular for handling cardboard cartons.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES [1] Operating the belt at its limit values may reduce service life. [2] Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.