TECHNICAL DATA SHEET

OKBE33462


metal-detectable urethane MT x MT 85A 2mm


ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

02 TECHNICAL SPECIFICATIONS

Unit weight	**0.0000**	lb/PIW		
Temperature — minimum [1]	**0**	°F	*−18*	°C
Temperature — maximum [1]	**0**	°F	*−18*	°C

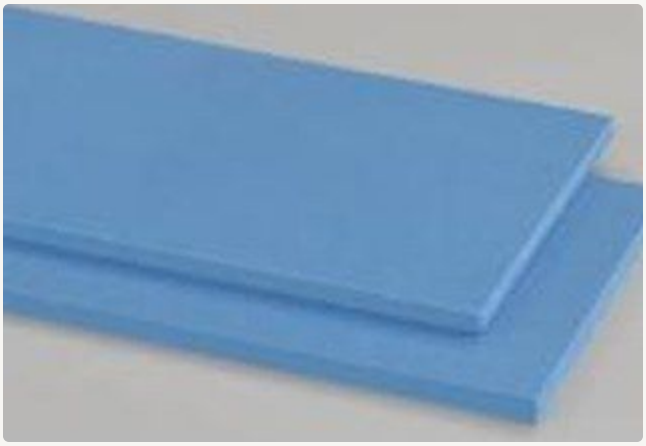



SOLID — ONE LAYER
homogeneous, no fabric

CROSS-SECTION — NOT TO SCALE

GAUGE 0.00 IN. / 0.00 MM

03 SPLICING & FASTENERS

Step size	**0.00 in**

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES [1] Operating the belt at its limit values may reduce service life. [2] Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.