TECHNICAL DATA SHEET

OKBE33464

metal-detectable urethane MTxMT 85A 3mm
FDA


ORIONTEK
ENGINEERING GOOD SOLUTIONS


01 CONSTRUCTION

TOP COVER	Compound	N/A
	Surface	N/A
	Colour	N/A
CARCASS	Fabric	N/A
	Number of plies	N/A
	Cross rigid	No
BOTTOM	Compound	N/A
	Surface	N/A

02 TECHNICAL SPECIFICATIONS

Unit weight	0.0000	lb/PIW		
Temperature – minimum (1)	0	°F	-18	°C
Temperature – maximum (1)	0	°F	-18	°C

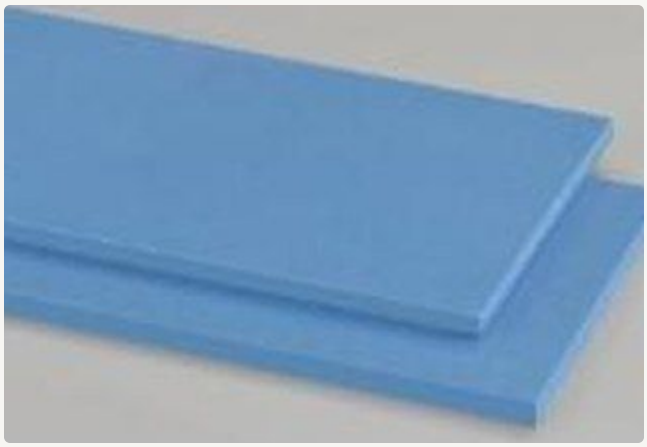



TOP COVER
n/a · n/a

1-PLY N/A
n/a

BOTTOM COVER
n/a · drive side

CROSS-SECTION – NOT TO SCALE

GAUGE 0.00 IN. / 0.00 MM

03 PROPERTIES

FDA compliant compound	YES
Oil resistant	NO
Fire resistant	NO
High heat	NO
Static conducting	NO
Cross rigid	NO
Impression (textured) top	NO

04 SPLICING & FASTENERS

Splice process	N/A
Step size	0.00 in

05 APPLICATION

N/A

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.