TECHNICAL DATA SHEET

# OKBE42204

3 Ply 170 White 70A Smooth x Bare G-1/HR/OR
Oil resistant

ORIONTEK
ENGINEERING GOOD SOLUTIONS

## 01 CONSTRUCTION

| | | | |
|---|---|---|---|
| TOP COVER | Compound | | White CSM Hypalon |
| | Thickness | 0.1970 in. | 5.00 mm |
| | Surface | | Smooth |
| | Hardness | | 70A Shore A |
| CARCASS | Number of plies | | 3 |
| | Skim between plies | | SBR |
| BOTTOM | Surface | | Bare |

## 02 TECHNICAL SPECIFICATIONS

| | | | | |
|---|---|---|---|---|
| Overall gauge | 0.3930 | in. | 9.98 | mm |
| Unit weight | 0.1700 | lb/PIW | | |
| Pull for 1% elongation | 170 | lbs/in. | 30 | N/mm |
| Temperature — minimum (1) | −40 | °F | −40 | °C |
| Temperature — maximum (1) | 300 | °F | 149 | °C |
| Max. production width | 65 | in. | 1651 | mm |

## 03 MINIMUM PULLEY DIAMETER (2)

| | | | | |
|---|---|---|---|---|
| ■ Normal flex | 4.7500 | in. | 120.65 | mm |
| ■ Back flex | 5.7500 | in. | 146.05 | mm |

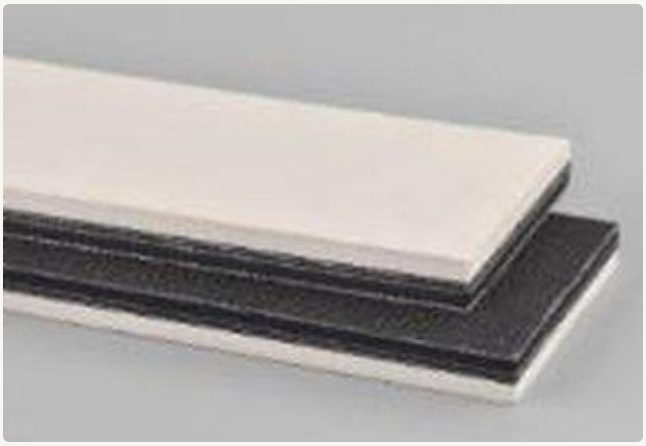

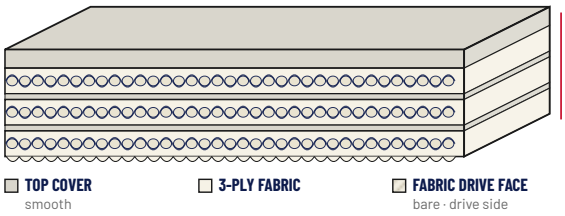


CROSS-SECTION — NOT TO SCALE

GAUGE 0.3930 IN. / 9.98 MM

## 04 PROPERTIES

| | |
|---|---|
| Oil resistant | YES |

## 05 SPLICING & FASTENERS

| | |
|---|---|
| Splice process | Step Hot |

**Oriontek service:** supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

**NOTES** (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

**DISCLAIMER** Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.