TECHNICAL DATA SHEET

OKBE42807

DDB25B2.8 DEL/DRIVE 25
FDA · Oil resistant

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


TOP COVER	Compound	**Polyurethane**
	Surface	**Smooth**
	Hardness	**93A Shore A**
CARCASS	Number of plies	**N/a**
BOTTOM	Compound	**Polyurethane**
	Surface	**1" Pitch Full Width**
	Hardness	**93A Shore A**


02 TECHNICAL SPECIFICATIONS

Overall gauge	**0.1100**	in.	*2.79*	*mm*
Unit weight	**0.0680**	lb/PIW		
Pull for 1% elongation	**17**	lbs/in.	*3*	*N/mm*
Temperature – minimum (1)	**–4**	°F	*–20*	*°C*
Temperature – maximum (1)	**140**	°F	*60*	*°C*
Max. production width	**48**	in.	*1219*	*mm*

03 MINIMUM PULLEY DIAMETER (2)

■ Normal flex	**1.8900**	in.	*48.01*	*mm*
■ Back flex	**2.8300**	in.	*71.88*	*mm*

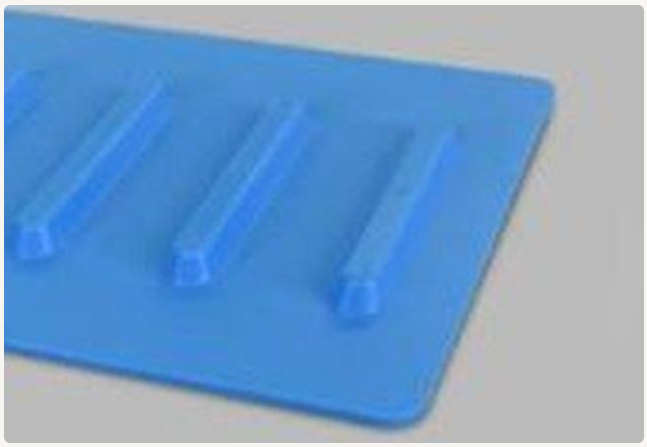



SOLID – ONE LAYER
smooth

CROSS-SECTION – NOT TO SCALE

GAUGE 0.1100 IN. / 2.79 MM

04 PROPERTIES

FDA compliant compound	**YES**
Oil resistant	**YES**
Fire resistant	**NO**
Antistatic	**NO**

05 SPLICING & FASTENERS

Splice process	**Butt Weld**

06 APPLICATION

Del/Drive 25 is a sprocket diameters. The belt is flexible and light, enabling reduced space requirements and better product transfer. Available in widths up to

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.