TECHNICAL DATA SHEET

OKBE50171

E5/2 U0/U2 BLUE HT AS
FDA

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


TOP COVER	Compound			**Blue PU**
	Thickness	**0.0079**	in.	*0.20 mm*
	Surface			**Matte**
	Hardness			**86 Shore A**
CARCASS	Number of plies			**2**
	Skim between plies			**PU**
	Cross rigid			**Yes**
BOTTOM	Compound			**PU Impregnated**
	Surface			**PU Impregnated**


02 TECHNICAL SPECIFICATIONS

Overall gauge	**0.0472**	in.	*1.20*	*mm*
Unit weight	**0.0205**	lb/PIW		
Pull for 1% elongation	**28**	lbs/in.	*5*	*N/mm*
Temperature – minimum (1)	**–4**	°F	*–20*	*°C*
Temperature – maximum (1)	**311**	°F	*155*	*°C*
Max. production width	**78**	in.	*1981*	*mm*

03 MINIMUM PULLEY DIAMETER (2)

■ Normal flex	**0.3150**	in.	*8.00*	*mm*
■ Back flex	**0.5906**	in.	*15.00*	*mm*

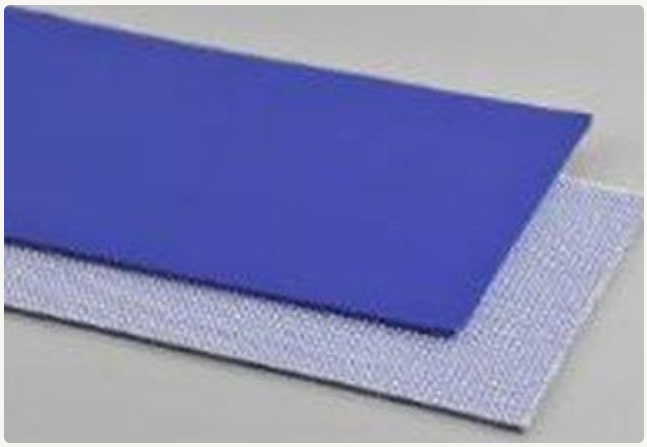

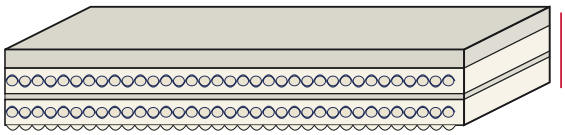

CROSS-SECTION – NOT TO SCALE

GAUGE 0.0472 IN. / 1.20 MM

04 PROPERTIES

FDA compliant compound	YES
Oil resistant	NO
Fire resistant	NO
Antistatic	YES
Cross rigid	YES
Impression (textured) top	NO

05 SPLICING & FASTENERS

Splice process	**Bias Double Finger**
Release foil	**Yes**

06 APPLICATION

#108HTB is ideal for oven infeed or outfeed applications in bakeries. The specialty urethane compound is uniquely resistant to heat and can handle temperatures up to 311°F.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.