TECHNICAL DATA SHEET

OKBE50244

E14/2 U0/RMV11 LR Green AS

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


TOP COVER	Compound			**Rubber Modified Vinyl**
	Thickness	**0.0433**	in.	*1.10 mm*
	Surface			**Longitudinally Grooved**
	Hardness			**35A Shore A**
CARCASS	Number of plies			**2**
	Skim between plies			**N/A**
	Cross rigid			**Yes**
BOTTOM	Compound			**PU Impregnated**
	Surface			**PU Impregnated**


02 TECHNICAL SPECIFICATIONS

Overall gauge	**0.0984**	in.	*2.50*	*mm*
Unit weight	**0.0574**	lb/PIW		
Pull for 1% elongation	**80**	lbs/in.	*14*	*N/mm*
Temperature – minimum (1)	**0**	°F	*–18*	*°C*
Temperature – maximum (1)	**150**	°F	*66*	*°C*
Max. production width	**78**	in.	*1981*	*mm*

03 MINIMUM PULLEY DIAMETER (2)

■ Normal flex	**2.0000**	in.	*50.80*	*mm*
■ Back flex	**2.6000**	in.	*66.04*	*mm*

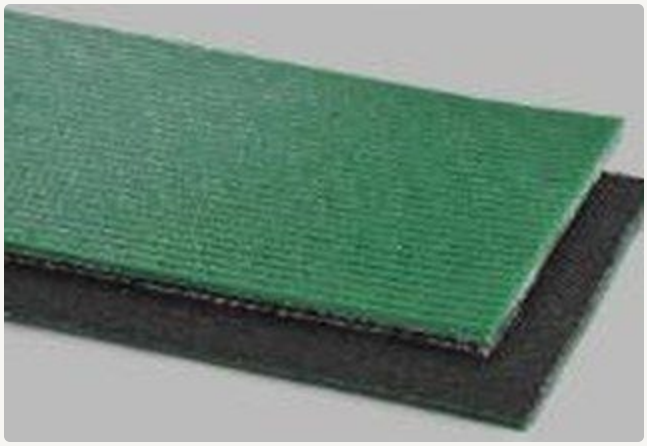

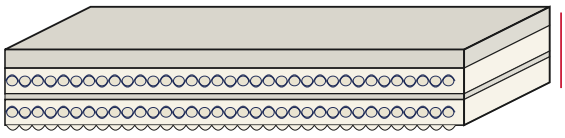

CROSS-SECTION – NOT TO SCALE

GAUGE 0.0984 IN. / 2.50 MM

04 PROPERTIES

FDA compliant compound	NO
Oil resistant	NO
Fire resistant	NO
Antistatic	YES
Cross rigid	YES
Impression (textured) top	NO

05 SPLICING & FASTENERS

Splice process	**Finger**
Release foil	**No**

06 APPLICATION

#118 HAL features a high friction longitudinally ribbed cover surface designed to handle packages on incline conveyors. The cover compound will also maintain its grip in wet conditions.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.