TECHNICAL DATA SHEET

OKBE50253

Thermoplastic polyurethane conveyor belt · Blue structured pattern · 4.50 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


TOP COVER	Material	**Thermoplastic Polyurethane**
	Surface	**Structured Pattern**
	Colour	**Blue**
BOTTOM	Material	**Polyamide Fabric**
	Surface	**Bare**
	Colour	**White/Black**


02 TECHNICAL SPECIFICATIONS

Total thickness	**4.50**	mm	*0.177*	*in.*
Weight			**1.1100 lb/ft²**	
Load at 1% elongation	**60**	N/mm	*342.6*	*lbs/in.*
Temperature — minimum (1)	**–10**	°C	*14*	*°F*
Temperature — maximum (1)	**60**	°C	*140*	*°F*
Coefficient of friction	**Top 0.5000 to 0.6000 (on steel) / drive side 0.2000 to 0.2500 (on steel)**			

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	**109.98**	mm	*4.33*	*in.*
■ Back-flex (counter-bending) pulley	**109.98**	mm	*4.33*	*in.*

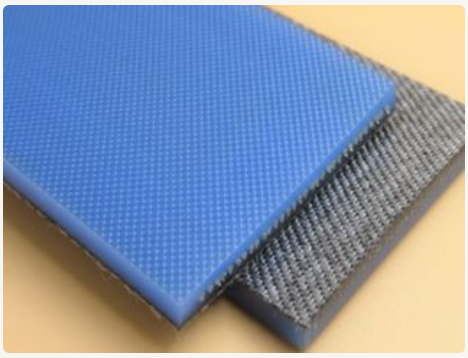

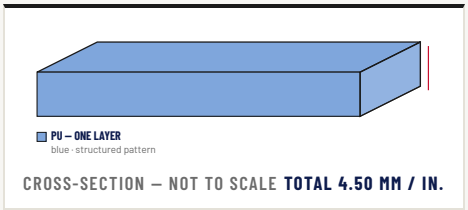

CROSS-SECTION – NOT TO SCALE **TOTAL 4.50 MM / IN.**

04 PROPERTIES

Antistatic	**YES**

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.