TECHNICAL DATA SHEET

OKBE50260

E12/2 V0/V3 Black RT FR
Fire resistant

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


TOP COVER	Compound			**Black PVC**
	Thickness	**0.1260**	in.	*3.20* *mm*
	Surface			**Roughtop**
	Hardness			**50 A Shore A**
CARCASS	Number of plies			**2**
	Skim between plies			**PVC**
	Cross rigid			**Yes**
BOTTOM	Compound			**Black PVC**
	Surface			**Quiet Weave**


02 TECHNICAL SPECIFICATIONS

Overall gauge	**0.1850**	in.	*4.70*	*mm*
Unit weight	**0.0632**	lb/PIW		
Pull for 1% elongation	**68**	lbs/in.	*12*	*N/mm*
Temperature – minimum (1)	**20**	°F	*–7*	*°C*
Temperature – maximum (1)	**170**	°F	*77*	*°C*
Max. production width	**78**	in.	*1981*	*mm*

03 MINIMUM PULLEY DIAMETER (2)

■ Normal flex	**1.2000**	in.	*30.48*	*mm*
■ Back flex	**3.9000**	in.	*99.06*	*mm*

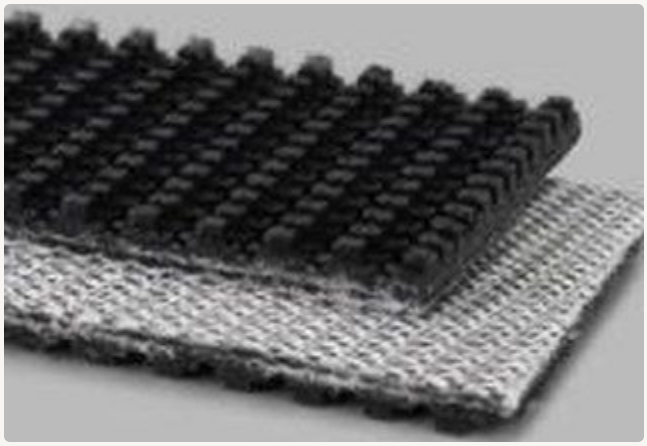

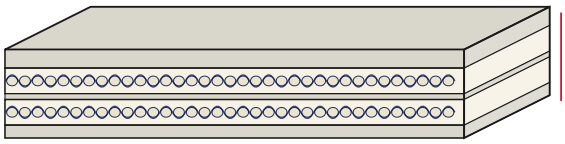

TOP COVER
roughtop

2-PLY FABRIC

BOTTOM COVER
quiet weave · drive side

CROSS-SECTION – NOT TO SCALE

GAUGE 0.1850 IN. / 4.70 MM

04 PROPERTIES

FDA compliant compound	NO
Oil resistant	NO
Fire resistant	YES
Antistatic	YES
Cross rigid	YES
Impression (textured) top	YES

05 SPLICING & FASTENERS

Splice process	**Finger**
Release foil	**No**

06 APPLICATION

#116FR is a flame retardant PVC rough top belt ideal for use on incline applications in logistics facilities.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek. All values are nominal.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.