TECHNICAL DATA SHEET

OKBEBLC-20AT-2

PVC conveyor belt · Black glossy · 2.3 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material	PVC
	Surface	Glossy
	Colour	Black
CARCASS	Fabric	Polyester Fabric
	Number of plies	2ply
BOTTOM	Material	Polyester
	Surface	Fabric
	Colour	White

02 TECHNICAL SPECIFICATIONS

Total thickness	**2.3**	mm	*0.091*	*in.*
Weight			**2.7 kg/m²**	
Elongation			**Standard 0.5%, max. 1.0%**	
Temperature — minimum (1)	**–10**	°C	*14*	*°F*
Temperature — maximum (1)	**70**	°C	*158*	*°F*

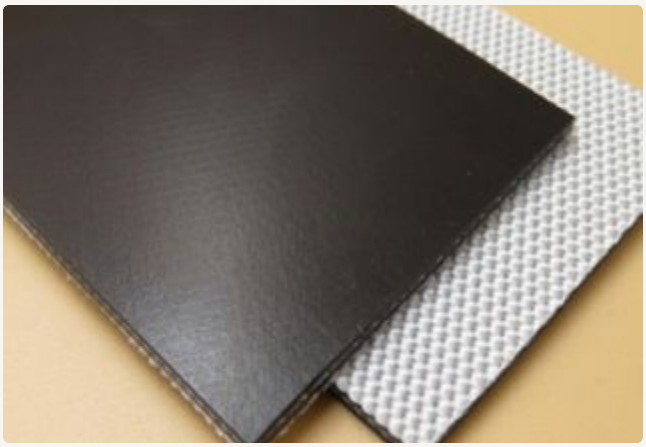

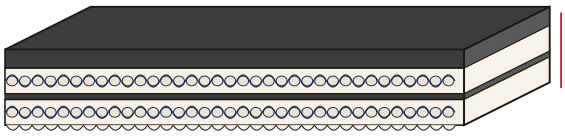

PVC COVER black · glossy
2-PLY POLYESTER polyester fabric
FABRIC DRIVE FACE fabric · drive side

CROSS-SECTION — NOT TO SCALE

TOTAL 2.3 MM / IN.

03 PROPERTIES

Antistatic	**YES**

04 APPLICATION

Tensile strength 200N/mm. Elongation at break 20%. Splice: Finger. Features: High flexibility. Typical uses: Curved conveyor; Merge conveyor.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.