TECHNICAL DATA SHEET

OKBEDB-2E12F

PU machine tape · Blue taffeta pattern · 1.2 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material	**TPU**
	Surface	**Taffeta pattern**
	Colour	**Blue**
CARCASS	Fabric	**Polyester Fabric**
BOTTOM	Material	**Conductive resin**
	Surface	**Matte Surface**
	Colour	**Black**

02 TECHNICAL SPECIFICATIONS

Total thickness	**1.2**	mm	*0.047*	*in.*
Weight	**1.5 kg/m²**			
Elongation	**Standard 1.0%, max. 2.0%**			
Temperature — minimum (1)	**–20**	°C	*–4*	*°F*
Temperature — maximum (1)	**60**	°C	*140*	*°F*
Max. production width	**340**	mm	*13*	*in.*

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	**25**	mm	*0.98*	*in.*
■ Back-flex (counter-bending) pulley	**25**	mm	*0.98*	*in.*

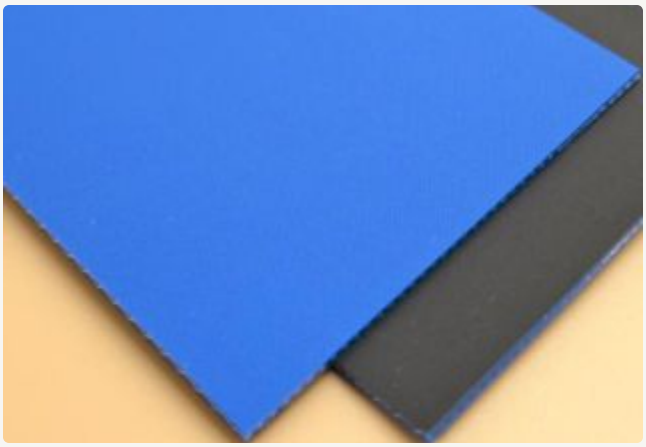



PU COVER blue · taffeta pattern
1-PLY POLYESTER polyester fabric
CONDUCTIVE RES COVER black · matte surface · driv

CROSS-SECTION — NOT TO SCALE

TOTAL 1.2 MM / IN.

04 PROPERTIES

Antistatic	**YES**

05 APPLICATION

Tensile strength 75N/mm. Max. allowable tension 4N/mm. Elongation at break 25%. Max. length 100m. Splice: Finger, (10×30). Features: High lateral rigidity, Slider bed, Roller bed. Typical uses: Bookbinding machine; Postal machine; Light duty conveyor.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.