TECHNICAL DATA SHEET

OKBEKS-100S

Nitrile power transmission belt · Green matt surface · 0.63 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material	**NBR**
	Surface	**Matt surface**
	Colour	**Green**
CARCASS	Fabric	**Polyamide Fabric**
BOTTOM	Material	**Polyamide/Cotton**
	Surface	**Fabric**
	Colour	**Orange**

02 TECHNICAL SPECIFICATIONS

Total thickness	**0.63**	mm	*0.025*	*in.*
Weight	**0.55 kg/m²**			
Elongation	**Standard 1.0%, max. 3.0%**			
Temperature — minimum (1)	**−20**	°C	*−4*	*°F*
Temperature — maximum (1)	**80**	°C	*176*	*°F*
Max. production width	**500**	mm	*20*	*in.*

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	**18**	mm	*0.71*	*in.*

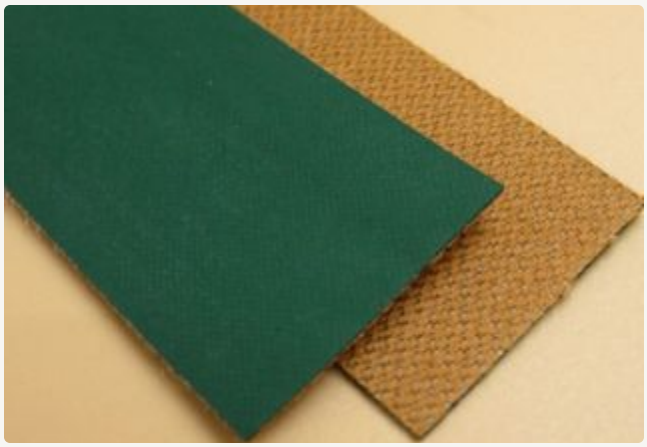



NITRILE COVER green · matt surface
1-PLY POLYAMIDE polyamide fabric
FABRIC DRIVE FACE fabric · drive side

CROSS-SECTION — NOT TO SCALE

TOTAL 0.63 MM / IN.

04 PROPERTIES

Antistatic	**YES**

05 APPLICATION

Tensile strength 70N/mm. Max. allowable tension 4.2N/mm. Elongation at break 20%. Max. length 100m. Splice: Skiver. Features: Abrasion resistance, Heat resistance.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.