TECHNICAL DATA SHEET

# OKCHN1135

2-ply elastomer conveyor belt · Green fh · 2.20 mm
High-friction conveying surface · Antistatic

**ORIONTEK**
ENGINEERING GOOD SOLUTIONS

Manufactured in Europe to Oriontek specification. Supplied, fabricated and installed by Oriontek.

## 01 CONSTRUCTION

| | | | |
|---|---|---|---|
| **CONVEYING** | Material | | **Synthetic elastomer** |
| | Thickness | **1.00** mm | *0.039 in.* |
| | Surface pattern | | **FH** |
| | Colour | | **Green** |
| | Coefficient of friction | | **HF — high friction** |
| **CARCASS** | Material | | **Polyester (PET)** |
| | Number of plies | | **2** |
| | Weft type | | **Flexible** |
| **DRIVING** | Material | | **Fabric, polyurethane (TPU) impregnated** |
| | Surface pattern | | **Fabric** |
| | Colour | | **Grey** |

## 02 TECHNICAL SPECIFICATIONS

| | | | | |
|---|---|---|---|---|
| Total thickness | **2.20** | mm | *0.09* | *in.* |
| Weight | **2.20** | kg/m² | *0.45* | *lbs/sq.ft* |
| Elongation at 1% | **12.0** | N/mm | *69.0* | *lbs/in.* |
| Max. admissible pull | **24** | N/mm | *137.0* | *lbs/in.* |
| Temperature — minimum (1) | **–20** | °C | *–4* | *°F* |
| Temperature — maximum (1) | **100** | °C | *212* | *°F* |
| Max. production width (3) | **1800** | mm | *71* | *in.* |

## 03 FRICTION — DRIVING SURFACE

| | |
|---|---|
| Raw steel sheet | **0.20** [-] |
| Laminated plastic / wood | **0.25** [-] |
| Steel roller | **0.20** [-] |
| Rubberized roller | **0.30** [-] |

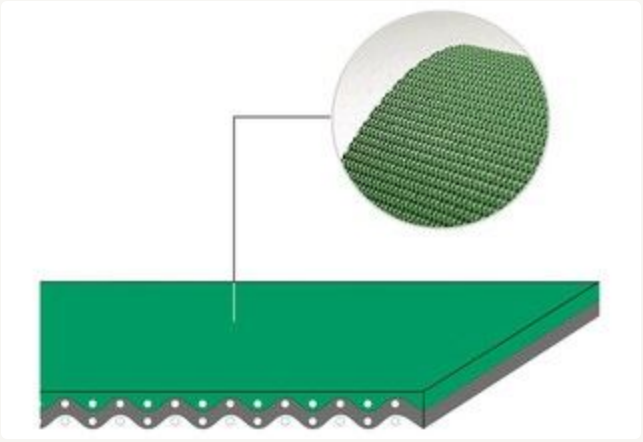

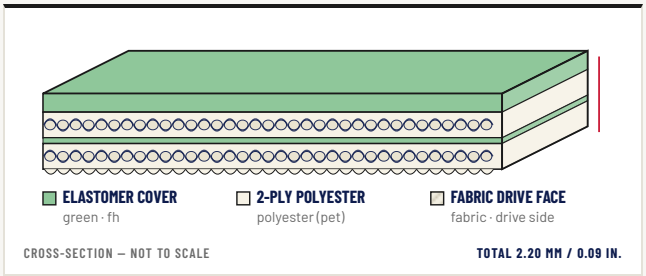


CROSS-SECTION — NOT TO SCALE

**TOTAL 2.20 MM / 0.09 IN.**

## 04 PERFORMANCE & HANDLING

| | |
|---|---|
| Humidity influence | NO |
| Suitable for metal detector | NO |
| Permanently antistatic, dynamic (UNI EN ISO 21179) | YES |
| Static conductivity (UNI EN ISO 284) | NO |
| Conveying on skid bed | YES |
| Conveying on rollers | YES |
| Skid bed on top *and* return | NO |
| Troughed conveying | YES |
| Curved conveyor | YES |
| Swan-neck conveying | NO |
| Inclined conveying | YES |
| Accumulation belts | NO |
| Chemical resistance rating | 6 |

## 05 COMPLIANCE

- REACH EC 1907/2006 and amendments

## 06 APPROVED APPLICATIONS

- Corrugated cardboard
- Airports
- Steel blankets magnetic elevators
- Packaging
- Curve belts
- Industrial laundries

**Oriontek service:** supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

**NOTES** (1) Operating the belt at its limit values may reduce service life. (2) Minimum radius and diameter values depend on the joint type specified by Oriontek. (3) Maximum production width 1800 mm / 71 in.; wider widths require prior authorization.

**DISCLAIMER** Values are laboratory results measured at +23 °C and 50% relative humidity. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.