TECHNICAL DATA SHEET


OKESA15G2F


PVC conveyor belt · Black 02 pattern g2
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material		**PVC**
	Thickness	**4.00** mm	*0.157* *in.*
	Surface		**Pattern G2**
	Colour		**Black 02**
	Hardness		**55 Shore A**
CARCASS	Fabric		**Polyester fabric**
BOTTOM	Material		**Low-friction fabric**
	Thickness	**0.10** mm	*0.004* *in.*
	Surface		**Impregn.**
	Colour		**Grey 00**

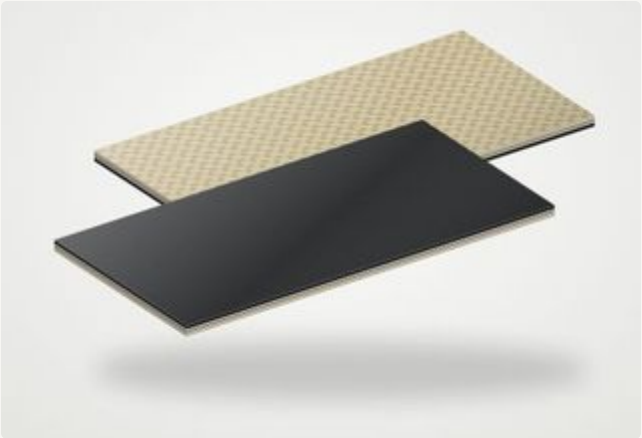



PVC COVER black 02 · pattern g2
1-PLY POLYESTER polyester fabric
FABRIC DRIVE FACE impregn. · drive side

CROSS-SECTION — NOT TO SCALE

03 PROPERTIES

Antistatic	**YES**

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.