TECHNICAL DATA SHEET


OKESA15W1F


PVC conveyor belt · Black 02 pattern w1
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material		PVC
	Thickness	6.00 mm	*0.236 in.*
	Surface		Pattern W1
	Colour		Black 02
	Hardness		65 Shore A
CARCASS	Fabric		Polyester fabric
BOTTOM	Material		Low-friction fabric
	Thickness	0.10 mm	*0.004 in.*
	Surface		Impregn.
	Colour		Grey 00

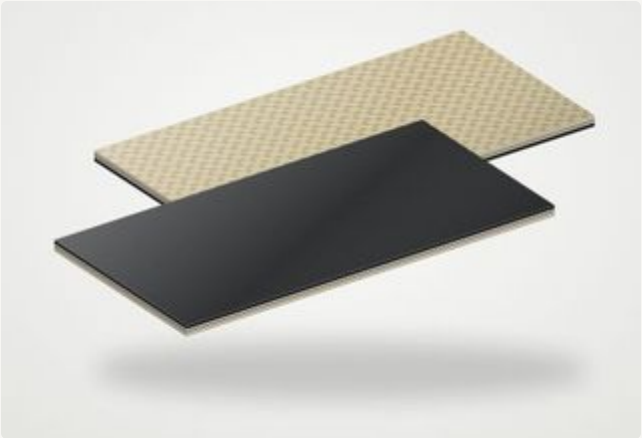



PVC COVER black 02 · pattern w1
1-PLY POLYESTER polyester fabric
FABRIC DRIVE FACE impregn. · drive side

CROSS-SECTION — NOT TO SCALE

03 PROPERTIES

Antistatic	YES

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.