TECHNICAL DATA SHEET


OKESV18T1F


TPO food-grade conveyor belt · Transparent pattern t1
FDA compliant compound

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material		**Polyolefin (TPO)**
	Thickness	**2.10** mm	*0.083 in.*
	Surface		**Pattern T1**
	Colour		**Transparent**
	Hardness		**91 Shore A**
CARCASS	Fabric		**Polyester fabric**
BOTTOM	Material		**Polyolefin (TPO)**
	Thickness	**0.10** mm	*0.004 in.*
	Surface		**Impregn.**
	Colour		**Natural**

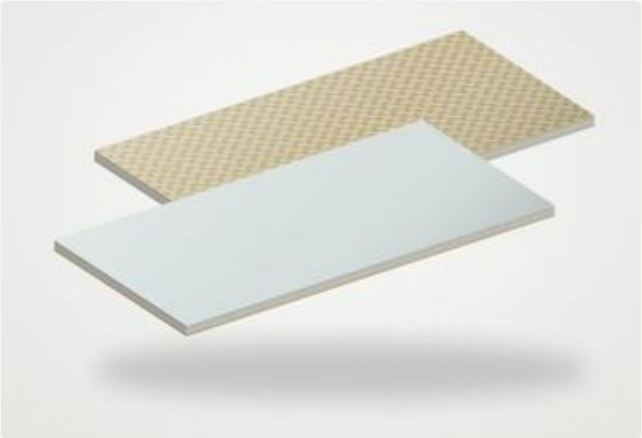



☐ **TPO COVER** transparent · pattern t1
☐ **1-PLY POLYESTER** polyester fabric
☐ **TPO COVER** natural · impregn. · drive s

CROSS-SECTION — NOT TO SCALE

03 PROPERTIES

FDA compliant compound	**YES**
EU food contact	**YES**

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.