TECHNICAL DATA SHEET

OKFO822115

Elastomer g flat belt / machine tape · Grey fine texture · 1.45 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material	**Elastomer G**
	Surface	**Fine texture**
	Colour	**Grey**
CARCASS	Fabric	**Mixed fabric, highly flexible**
BOTTOM	Material	**Elastomer G**
	Surface	**Fine texture**
	Colour	**Grey**


02 TECHNICAL SPECIFICATIONS


Total thickness	**1.45**	mm	*0.057*	*in.*
Weight			**0.297 lb/ft²**	
Load at 1% elongation	**2.5**	N/mm	*14.3*	*lbs/in.*
Temperature – minimum (1)	**–20**	°C	*–4*	*°F*
Temperature – maximum (1)	**70**	°C	*158*	*°F*
Max. production width	**1000**	mm	*39*	*in.*
Coefficient of friction			**Top 1.6 / drive side 1.6**	

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	**14**	mm	*0.55*	*in.*
■ Back-flex (counter-bending) pulley	**14**	mm	*0.55*	*in.*



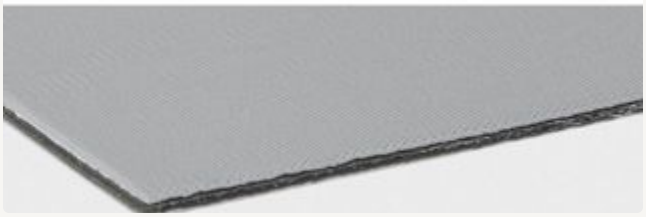



ELASTOMER COVER grey · fine texture
1-PLY MIXED FABRIC, mixed fabric, highly flexibl
ELASTOMER COVER grey · fine texture · drive

CROSS-SECTION – NOT TO SCALE

TOTAL 1.45 MM / 0.057 IN.

04 PROPERTIES

Antistatic	**YES**
Troughed conveying	NO
Accumulation conveying	NO

05 APPLICATION

Packaging (Packaging machines); Paper Manufacturing (Cross-cutters (paper, cardboard, plastic film); Envelope machines); Paper Manufacturing, Packaging (Carrier belt for paper and packaging); Postal (Letter sorting machines); Printing (Automatic labellers; Folders newspaper (coldset); Post press (compensating stackers, bundlers); Post press (trimmers, 3-knife trimmers); Sheet-fed printing (folding machines, sheet fee

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.