TECHNICAL DATA SHEET

OKFO850207

Polyurethane flat belt / machine tape · Green (~RAL 5001) fine texture · 1.1 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material	**Polyurethane**
	Surface	**Fine texture**
	Colour	**Green (~RAL 5001)**
CARCASS	Fabric	**Polyurethane, elastic**
BOTTOM	Material	**Polyurethane**
	Surface	**Coarse texture**
	Colour	**Black**


02 TECHNICAL SPECIFICATIONS


Total thickness	**1.1**	mm	*0.043*	*in.*
Weight			**0.246 lb/ft²**	
Load at 1% elongation	**0.12**	N/mm	*0.7*	*lbs/in.*
Temperature — minimum (1)	**–20**	°C	*–4*	*°F*
Temperature — maximum (1)	**60**	°C	*140*	*°F*
Max. production width	**1200**	mm	*47*	*in.*
Coefficient of friction			**Top 0.6 / drive side 0.6**	

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	**10**	mm	*0.39*	*in.*
■ Back-flex (counter-bending) pulley	**10**	mm	*0.39*	*in.*



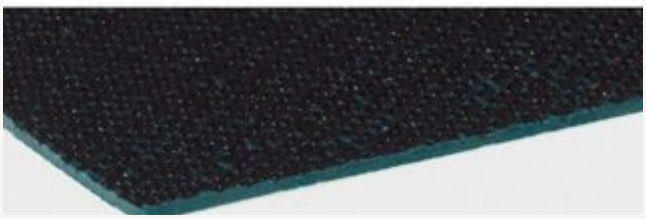



PU COVER
green (~ral 5001) · fine tex

1-PLY PU
polyurethane, elastic

PU COVER
black · coarse texture · dri

CROSS-SECTION — NOT TO SCALE

TOTAL 1.1 MM / 0.043 IN.

04 PROPERTIES

Antistatic	**YES**
Troughed conveying	**YES**
Accumulation conveying	**NO**

05 APPLICATION

Conveying office (Automatic teller machines (ATM); Franking machines); Packaging (Packaging machines); Paper Manufacturing (Cross-cutters (paper, cardboard, plastic film)); Paper Manufacturing, Packaging (Carrier belt for paper and packaging); Postal (Letter sorting machines); Printing (Letter sorting machines: turner belt; Post press (compensating stackers, bundlers); Sheet-fed printing (folding machines, sheet feed

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.