TECHNICAL DATA SHEET

OKFO855582

Elastomer g flat belt / machine tape · Green fabric · 1.3 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


TOP COVER	Material	**Elastomer G**
	Surface	**Fabric**
	Colour	**Green**
CARCASS	Fabric	**Polyamide sheet, highly-orientated**
BOTTOM	Material	**Polyamide fabric, impregnated**
	Surface	**Fabric**
	Colour	**Green**


02 TECHNICAL SPECIFICATIONS

Total thickness	**1.3**	mm	*0.051*	*in.*
Weight			**0.236 lb/ft²**	
Load at 1% elongation	**3**	N/mm	*17.1*	*lbs/in.*
Temperature – minimum (1)	**–20**	°C	*–4*	*°F*
Temperature – maximum (1)	**80**	°C	*176*	*°F*
Max. production width	**510**	mm	*20*	*in.*
Coefficient of friction			**Top 1.1 / drive side 0.7**	

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	**24**	mm	*0.94*	*in.*
■ Back-flex (counter-bending) pulley	**24**	mm	*0.94*	*in.*

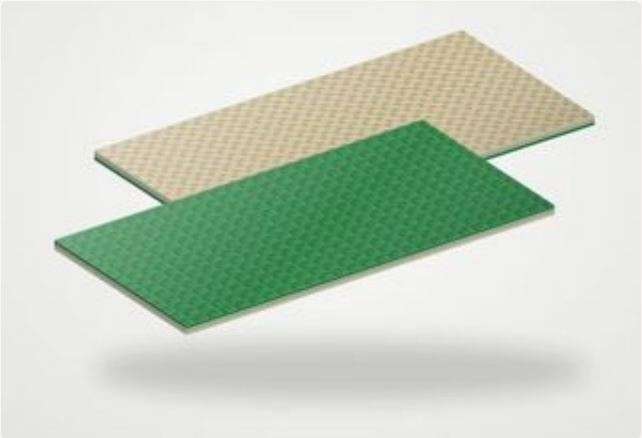



FABRIC TOP FACE
fabric · green

1-PLY POLYAMIDE
polyamide sheet, highly-orie

FABRIC DRIVE FACE
fabric · drive side

CROSS-SECTION – NOT TO SCALE

TOTAL 1.3 MM / 0.051 IN.

04 PROPERTIES

Antistatic	YES
Troughed conveying	NO
Accumulation conveying	NO

05 APPLICATION

Packaging (Plastic film and shrink wrapping machines); Paper Manufacturing (Cross-cutters (paper, cardboard, plastic film); Paper bags, plastic bags: pick-off belt; Tissue industry); Paper Manufacturing, Packaging (Carrier belt for paper and packaging); Printing (Folders newspaper (coldset); Folders web offset printing / heatset (ORR); Newspaper printing (coldset); Post press (compensating stackers, bundlers); Post p

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.