TECHNICAL DATA SHEET

OKFO855607

Elastomer g flat belt / machine tape · Black (whirl/spindle/rotor) fine texture · 3.2 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


TOP COVER	Material	**Elastomer G**
	Surface	**Fine texture**
	Colour	**Black (whirl/spindle/rotor)**
CARCASS	Fabric	**Polyamide sheet, highly-orientated**
BOTTOM	Material	**Elastomer G**
	Surface	**Normal texture**
	Colour	**Grey (drive/pulley)**

02 TECHNICAL SPECIFICATIONS

Total thickness	**3.2**	mm	*0.126*	*in.*
Weight			**0.717 lb/ft²**	
Load at 1% elongation	**15**	N/mm	*85.7*	*lbs/in.*
Temperature – minimum (1)	**–20**	°C	*–4*	*°F*
Temperature – maximum (1)	**80**	°C	*176*	*°F*
Max. production width	**510**	mm	*20*	*in.*
Coefficient of friction			**Top 0.9 / drive side 0.9**	

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	**125**	mm	*4.92*	*in.*
■ Back-flex (counter-bending) pulley	**125**	mm	*4.92*	*in.*

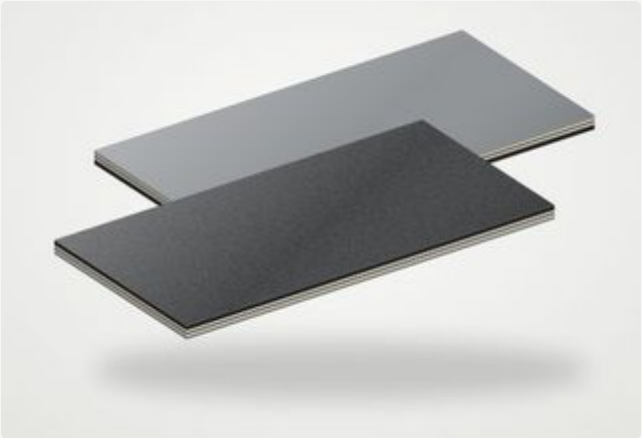



■ **ELASTOMER COVER** black (whirl/spindle/rotor)
□ **1-PLY POLYAMIDE** polyamide sheet, highly-orie
■ **ELASTOMER COVER** grey (drive/pulley) · normal

CROSS-SECTION – NOT TO SCALE

TOTAL 3.2 MM / 0.126 IN.

04 PROPERTIES

Antistatic	**YES**
Troughed conveying	**NO**
Accumulation conveying	**NO**

05 APPLICATION

Distribution Parcel, Carrier, Sores (Live Roller conveyor); Paper Manufacturing (Paper machines); Printing (Winding paper, unwinding paper); Yarn (2-pulley power transmission belt; Multi-pulley power transmission belt; Ring spinning frames (Marzoli); Ring spinning frames (Zinser 321); Tangential belt; Tangential belt / sectional drives)

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.