TECHNICAL DATA SHEET

OKHBMAM-04HE

0-ply nitrile power transmission belt · Black rough structure · 1.5 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material	**NBR rubber**
	Surface	**Rough structure**
	Colour	**Black**
CARCASS	Fabric	**Polyamide compound**
	Number of plies	**0**
BOTTOM	Material	**NBR rubber**
	Surface	**Rough structure**
	Colour	**Black**

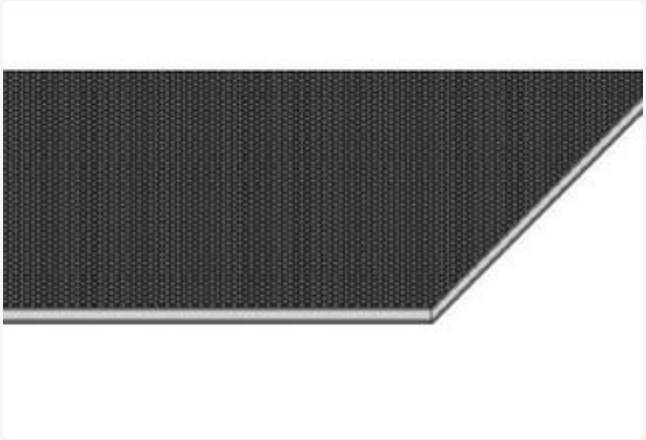

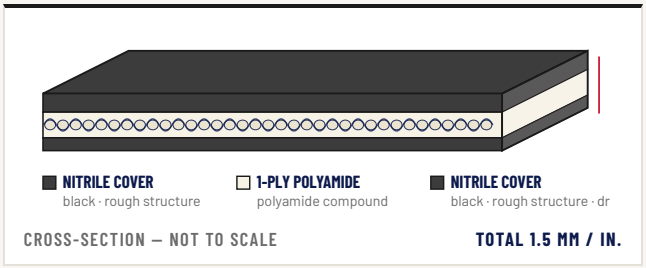

CROSS-SECTION — NOT TO SCALE — **TOTAL 1.5 MM / IN.**

02 TECHNICAL SPECIFICATIONS

Total thickness	**1.5**	mm	*0.059*	*in.*
Weight			**1.5 kg/m²**	
Temperature — minimum [1]	**–20**	°C	*–4*	*°F*
Temperature — maximum [1]	**60**	°C	*140*	*°F*
Max. production width	**1140**	mm	*45*	*in.*

03 MINIMUM PULLEY DIAMETER [2]

■ Minimum pulley / nose bar	**15**	mm	*0.59*	*in.*
■ Back-flex (counter-bending) pulley	**15**	mm	*0.59*	*in.*

04 PROPERTIES

Antistatic	**YES**
Slider bed	**YES**
Roller bed	**YES**
Troughed	**YES**

05 APPLICATION

Features: Abrasion resistant, Easy release, Constant and gentle positive grip, Dimensionally stable, Elastic, Static conductive. Typical uses: Letter transport belt, Machine tape, Mail handling / mail sorting belt, Paper handling belt. Industries: Letter sorting.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES [1] Operating the belt at its limit values may reduce service life. [2] Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.

SOLUTIONS@ORIONTEK.US · 786-440-6995 · ORIONTEK.US