TECHNICAL DATA SHEET

OKHBMAM-5E

1-ply nitrile power transmission belt · Green fine structure · 1.40 mm
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material	**NBR rubber**
	Surface	**Fine structure**
	Colour	**Green**
CARCASS	Fabric	**Polyester (PET) fabric**
	Number of plies	**1**
BOTTOM	Material	**NBR rubber**
	Surface	**Fine structure**
	Colour	**Black**

02 TECHNICAL SPECIFICATIONS

Total thickness	**1.40**	mm	*0.055*	*in.*
Weight			**1.5 kg/m²**	
Load at 1% elongation	**3.2**	N/mm	*18.3*	*lbs/in.*
Temperature – minimum (1)	**–20**	°C	*–4*	*°F*
Temperature – maximum (1)	**60**	°C	*140*	*°F*
Max. production width	**1140**	mm	*45*	*in.*

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	**25**	mm	*0.98*	*in.*
■ Back-flex (counter-bending) pulley	**25**	mm	*0.98*	*in.*

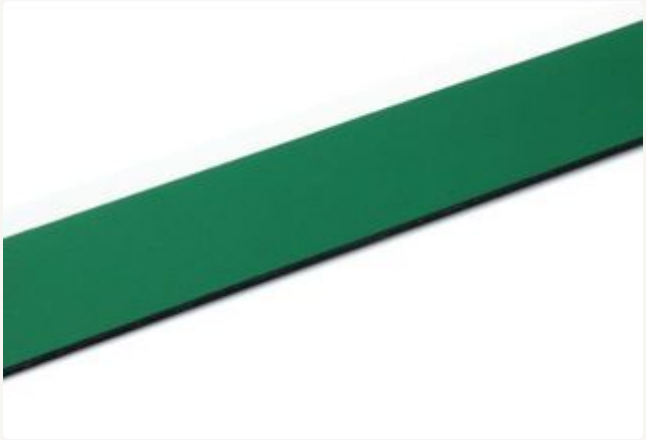



NITRILE COVER green · fine structure
1-PLY POLYESTER polyester (pet) fabric
NITRILE COVER black · fine structure · dri

CROSS-SECTION – NOT TO SCALE

TOTAL 1.40 MM / IN.

04 PROPERTIES

Antistatic	**YES**
Slider bed	**YES**
Roller bed	**YES**

05 APPLICATION

Features: Abrasion resistant, Adhesive-free joint, Constant and gentle positive grip, Dimensionally stable, Low noise applications suitable, Versatile, Outstanding flex-fatigue. Typical uses: Letter transport belt, Machine tape, Mail handling / mail sorting belt, Paper handling belt, Sheeter/Crosscutter belt. Industries: Letter sorting, Paper manufacturing and processing, Paper printing and finishing, Secondary packaging.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.