TECHNICAL DATA SHEET

OKHBNAB-15EVDV

2-ply PVC conveyor belt · Dark green smooth · 3.0 mm

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material	PVC
	Surface	Smooth
	Colour	Dark green
CARCASS	Fabric	Polyester (PET)
	Number of plies	2
BOTTOM	Material	PVC
	Surface	Inverted pyramid structure
	Colour	Dark green


02 TECHNICAL SPECIFICATIONS

Total thickness	**3.0**	mm	*0.118*	*in.*
Weight			**3.5 kg/m²**	
Load at 1% elongation	**8.0**	N/mm	*45.7*	*lbs/in.*
Temperature – minimum [1]	**–10**	°C	*14*	*°F*
Temperature – maximum [1]	**70**	°C	*158*	*°F*
Max. production width	**3000**	mm	*118*	*in.*
Coefficient of friction			**Drive side on steel 0.35**	

03 MINIMUM PULLEY DIAMETER [2]

■ Minimum pulley / nose bar	**50**	mm	*1.97*	*in.*
■ Back-flex (counter-bending) pulley	**50**	mm	*1.97*	*in.*



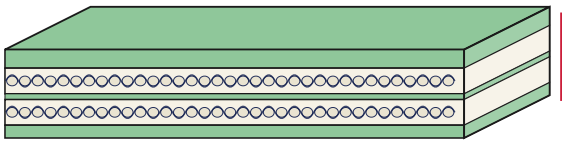

PVC COVER
dark green · smooth

2-PLY POLYESTER
polyester (pet)

PVC COVER
dark green · inverted pyrami

CROSS-SECTION – NOT TO SCALE

TOTAL 3.0 MM / IN.

04 PROPERTIES

Metal detector friendly	YES
Roller bed	YES

05 APPLICATION

Features: Abrasion resistant, Chemical resistant, Reverse side coated. Typical uses: Decline belt, Incline belt, Infeed belt, Inserting belt. Industries: Distribution centers, Plastics, Solid wood, Wood surfacing.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES [1] Operating the belt at its limit values may reduce service life. [2] Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.

SOLUTIONS@ORIONTEK.US · 786-440-6995 · ORIONTEK.US