TECHNICAL DATA SHEET


OKRB-CAC


PU application belt (built to order)·

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION

TOP COVER	Material	**Rubber or polyurethane to suit**

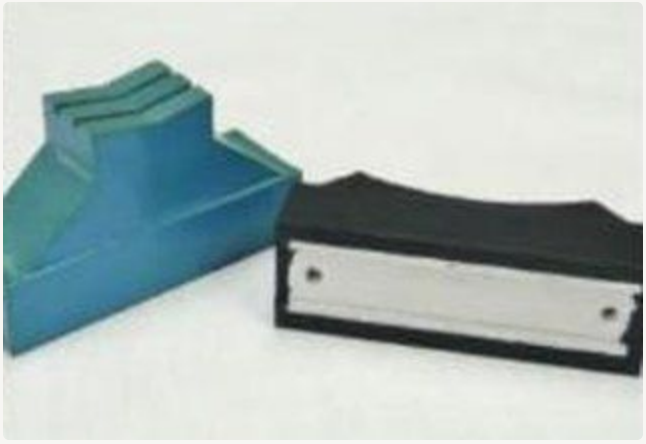



PU — ONE LAYER
homogeneous, no fabric

CROSS-SECTION — NOT TO SCALE

03 APPLICATION

Has a number of products to aid and complement our belting. Drawing on 30 years of experience and industry knowledge, these products have been developed to serve specific applications. Each has been tested and proven in the plastic industry. Advantages: Rubber and polyurethane cleats with and without metal plates Quick change / quick release Fixed / bolt-on Durometer: 40-80 Molded for an exact fit with extruded profile

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.