TECHNICAL DATA SHEET

OKUB110225

2-ply pu food-grade conveyor belt · Blue matt · 1.65 mm
FDA compliant compound

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


TOP COVER	Material	PU
	Surface	Matt
	Colour	Blue
	Hardness	85 Shore A
CARCASS	Fabric	Spun Polyester Fabric
	Number of plies	2
BOTTOM	Material	Spun Polyester Fabric
	Surface	Impregnated
	Colour	White


02 TECHNICAL SPECIFICATIONS

Total thickness	**1.65**	mm	*0.065*	*in.*
Weight	**1.80 kg/m² 0.37 lb/ft²**			
Load at 1% elongation	**8**	N/mm	*45.7*	*lbs/in.*
Temperature – minimum (1)	**–30**	°C	*–22*	*°F*
Temperature – maximum (1)	**90**	°C	*194*	*°F*
Max. production width	**3000**	mm	*118*	*in.*
Coefficient of friction	**0.25**			

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	**10.00**	mm	*0.39*	*in.*
■ Back-flex (counter-bending) pulley	**25.00**	mm	*0.98*	*in.*

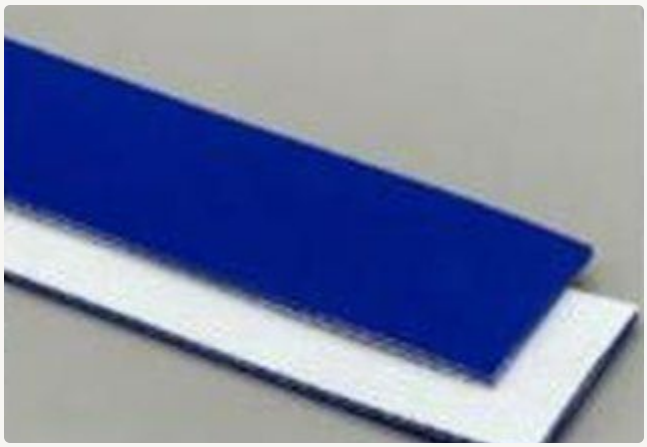

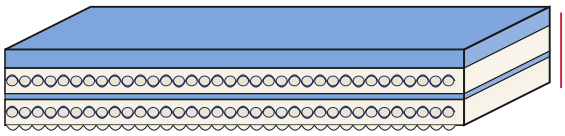

PU COVER blue · matt
2-PLY POLYESTER spun polyester fabric
FABRIC DRIVE FACE impregnated · drive side

CROSS-SECTION – NOT TO SCALE

TOTAL 1.65 MM / 0.065 IN.

04 PROPERTIES

FDA compliant compound	YES
USDA meat & poultry	NO
USDA dairy	NO
Flame retardant	NO
Cross rigid	NO

05 APPLICATION

2 ply spun fabric matte top cover. Suitable for curve belts, metal detectors, general bakery and confectionary lines. Excellent for older and problematic equipment.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.