TECHNICAL DATA SHEET

OKUB120105

1-ply pu food-grade conveyor belt · Amber diamond (rhomboid) embossed · 0.80 mm
FDA compliant compound

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


TOP COVER	Material	PU
	Surface	Diamond (Rhomboid) Embossed
	Colour	Amber
	Hardness	85 Shore A
CARCASS	Fabric	Polyester Fabric
	Number of plies	1
BOTTOM	Material	Polyester Fabric
	Surface	PU Impregnated
	Colour	White


02 TECHNICAL SPECIFICATIONS

Total thickness	0.80	mm	*0.031*	*in.*
Weight	0.80 kg/m² 0.16 lb/ft²			
Load at 1% elongation	3	N/mm	*17.1*	*lbs/in.*
Temperature – minimum (1)	−30	°C	*−22*	*°F*
Temperature – maximum (1)	100	°C	*212*	*°F*
Max. production width	1575	mm	*62*	*in.*
Coefficient of friction	0.25			

03 MINIMUM PULLEY DIAMETER (2)

■ Minimum pulley / nose bar	8.00	mm	*0.31*	*in.*
■ Back-flex (counter-bending) pulley	16.00	mm	*0.63*	*in.*

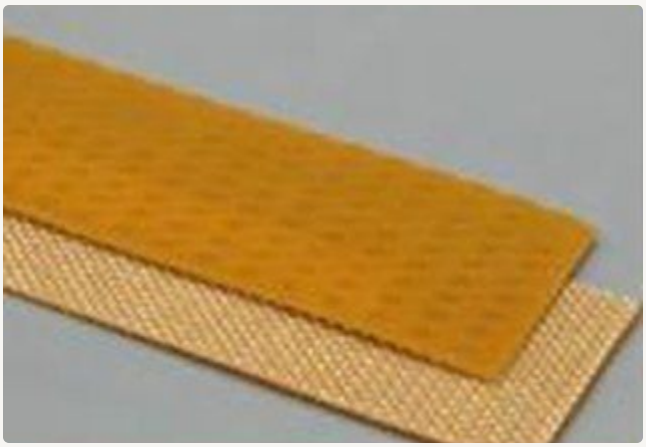



PU COVER
amber · diamond (rhomboid) e

1-PLY POLYESTER
polyester fabric

FABRIC DRIVE FACE
pu impregnated · drive side

CROSS-SECTION — NOT TO SCALE

TOTAL 0.80 MM / 0.031 IN.

04 PROPERTIES

FDA compliant compound	YES
USDA meat & poultry	NO
USDA dairy	NO
Flame retardant	NO
Cross rigid	YES

05 APPLICATION

1 Ply monofilament with Diamond Emboss. Great for cooling tunnels, long life baked goods and confectionary applications.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.