TECHNICAL DATA SHEET

OKUB351133

1-ply highly abrasion resistant rubber conveyor belt · Black


ORIONTEK
ENGINEERING GOOD SOLUTIONS


01 CONSTRUCTION

TOP COVER	Material	**Highly Abrasion Resistant Rubber**
	Colour	**Black**
CARCASS	Fabric	**Nylon**
	Number of plies	**1**
BOTTOM	Material	**Highly Abrasion Resistant Rubber**

02 TECHNICAL SPECIFICATIONS

Weight	**4.00 kg/m² 0.82 lbf/ft²**

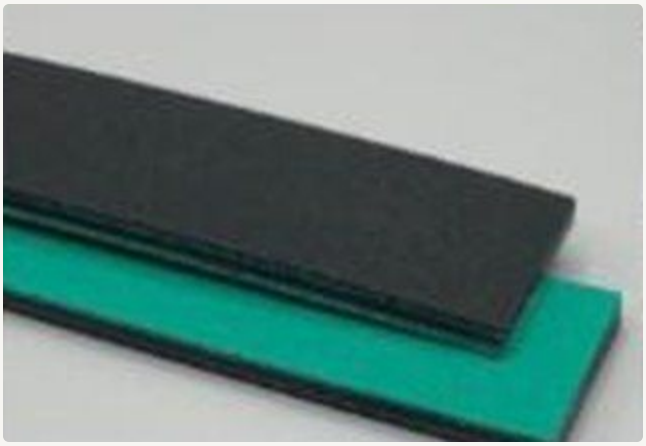

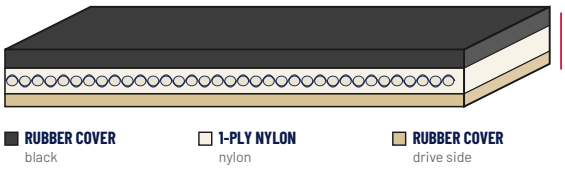

RUBBER COVER black · 1-PLY NYLON nylon · RUBBER COVER drive side

CROSS-SECTION — NOT TO SCALE

03 PROPERTIES

FDA compliant compound	NO
USDA meat & poultry	NO
USDA dairy	NO
Flame retardant	NO
Cross rigid	YES

04 APPLICATION

K2000 Adhesive on Polyamide Surface AF Adhesive for elastomer G (Rubber) Suitable for power transmission and spindle drives (black side = spindle Storage at normal temperature conditions of 20°C/50%

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.