TECHNICAL DATA SHEET

OKUB351155

1-ply g elastomer conveyor belt · Green


ORIONTEK
ENGINEERING GOOD SOLUTIONS


01 CONSTRUCTION

TOP COVER	Material	G Elastomer
	Colour	Green
CARCASS	Fabric	Nylon
	Number of plies	1
BOTTOM	Material	Impregnated Polyamide Fabric

02 TECHNICAL SPECIFICATIONS

Weight	1.15 kg/m² 0.24 lbf/ft²

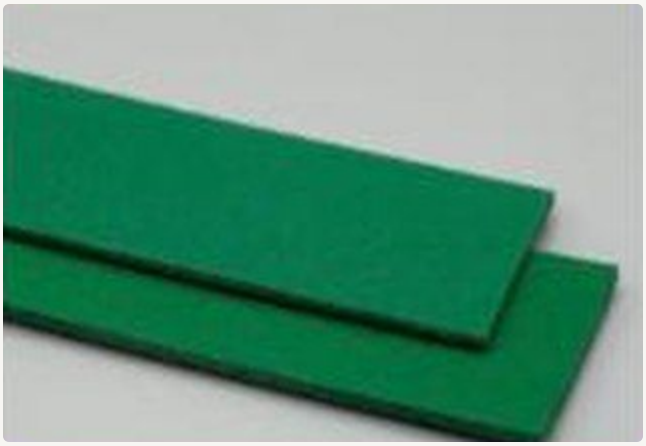



ELASTOMER COVER
green

1-PLY NYLON
nylon

FABRIC DRIVE FACE
impregnated polyamide fabr

CROSS-SECTION — NOT TO SCALE

03 PROPERTIES

FDA compliant compound	NO
USDA meat & poultry	NO
USDA dairy	NO
Flame retardant	NO
Cross rigid	YES

04 APPLICATION

K2000 Adhesive on Polyamide Surface AF Adhesive for elastomer G (Rubber) Suitable for paper transport, light weight power transmission, and various specialty applications. Storage at normal temperature conditions of 23° C/50% Humidity recommended.

Oriontek service: supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.