TECHNICAL DATA SHEET

OKWM-FWP

Flat wire belt with pickets and variable openings · built to order

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


Nesting pickets with clinched or welded edges; openings sized to product and airflow; standard or heavy duty

Materials: 304 and 316L stainless; work-hardened stainless; galvanized

02 TECHNICAL RANGE

Widths	**To 256 in.**
Speed	**To 250 fpm**
Temperature	**To 1,000 °F**

To quote, send width, length, mesh or pitch (spirals and rods per foot), wire gauges, edge type, drive and a photo or sample piece.

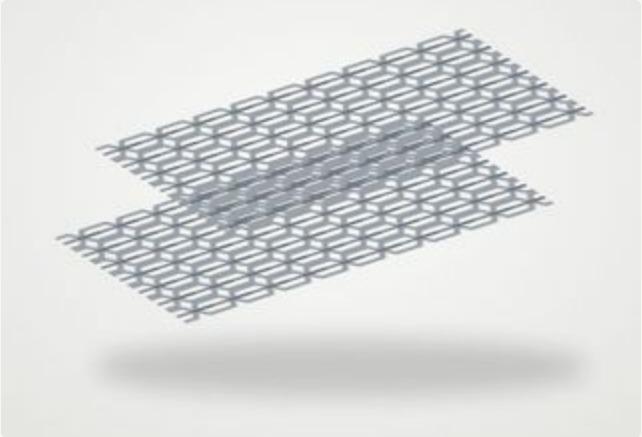

03 APPLICATIONS

Cooling and freezing, seafood, general processing

Oriontek service: new belts, repair sections and splice links; flights, side guards, edge chains and matching sprockets; onsite installation.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Belts are built to order; confirm width, length, splice and guide with Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.

SOLUTIONS@ORIONTEK.US · 786-440-6995 · ORIONTEK.US