TECHNICAL DATA SHEET

OKWM-PD

Precision sprocket-driven woven belt · built to order

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


Woven belt built to pitch tolerance and driven by matched precision sprockets for exact tracking

Materials: 304, 316L, 430 stainless; high-carbon and galvanized steel; high-carbon steel

02 TECHNICAL RANGE

Widths	**To 156 in.**
Speed	**To 600 fpm**
Temperature	**To 1,000 °F**

To quote, send width, length, mesh or pitch (spirals and rods per foot), wire gauges, edge type, drive and a photo or sample piece.

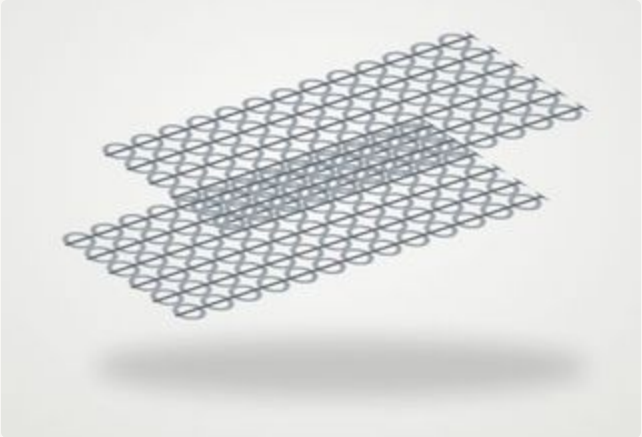

03 APPLICATIONS

Tight-tolerance lines, ovens, pasteurisers

Oriontek service: new belts, repair sections and splice links; flights, side guards, edge chains and matching sprockets; onsite installation.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Belts are built to order; confirm width, length, splice and guide with Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.

SOLUTIONS@ORIONTEK.US · 786-440-6995 · ORIONTEK.US