TECHNICAL DATA SHEET

OKWM-SGH

Heavy-duty and tight-radius spiral belt · built to order

ORIONTEK
ENGINEERING GOOD SOLUTIONS

01 CONSTRUCTION


High-strength grid or open-link spiral belt for maximum throughput in a minimal footprint

Materials: 304 and 316L stainless; work-hardened stainless

02 TECHNICAL RANGE

Widths	**To 60 in.**
Turn ratio	**0.8 to 4.0 x belt width**
Radius tension	**To 650 lb**
Speed	**To 250 fpm**

To quote, send width, length, mesh or pitch (spirals and rods per foot), wire gauges, edge type, drive and a photo or sample piece.

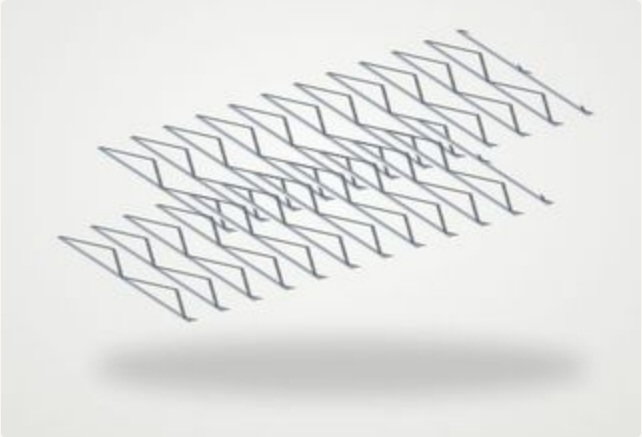

03 APPLICATIONS

High-volume cooking, baking and freezing spirals

Oriontek service: new belts, repair sections and splice links; flights, side guards, edge chains and matching sprockets; onsite installation.

NOTES (1) Operating the belt at its limit values may reduce service life. (2) Belts are built to order; confirm width, length, splice and guide with Oriontek.

DISCLAIMER Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.

SOLUTIONS@ORIONTEK.US · 786-440-6995 · ORIONTEK.US