TECHNICAL DATA SHEET


# OKYLU2-3-19RDZA


1-ply PU conveyor belt · Black longitudinal rib
Antistatic

ORIONTEK
ENGINEERING GOOD SOLUTIONS

## 01 CONSTRUCTION

| | | |
|---|---|---|
| TOP COVER | Material | **Polyurethane (TPU)** |
| | Surface | **Longitudinal Rib** |
| | Colour | **Black** |
| CARCASS | Fabric | **Interwoven, Rigid, Low Noise** |
| | Number of plies | **1** |

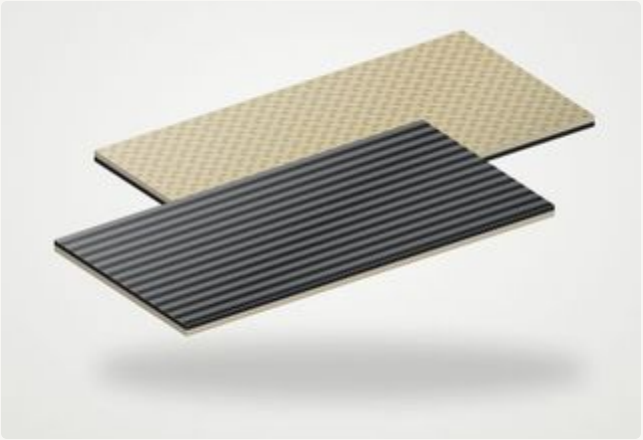



**PU COVER** black · longitudinal rib
**1-PLY INTERWOVEN, RI** interwoven, rigid, low noise
**FABRIC DRIVE FACE** fabric · drive side

CROSS-SECTION — NOT TO SCALE

## 03 PROPERTIES

| | |
|---|---|
| Antistatic | **YES** |

## 04 APPLICATION

Low running noise.

**Oriontek service:** supplied endless-joined, open-length or fabricated with profiles, sidewalls, cleats and V-guides. Onsite splicing available.

**NOTES** (1) Operating the belt at its limit values may reduce service life. (2) Minimum pulley diameters depend on belt tension and on the splice or fastener specified by Oriontek.

**DISCLAIMER** Values are nominal. They describe the product as tested and do not necessarily reflect conditions of industrial use, nor do they guarantee suitability for a specific application. The customer remains responsible for correct selection and use. Oriontek cannot be held liable for damages arising from use of this product. Specifications may be revised without prior notice.